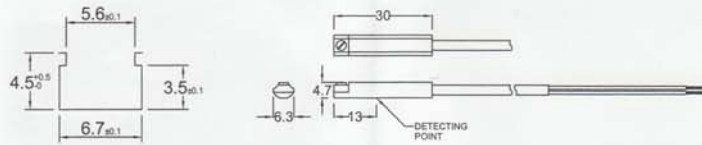



**MODEL**

070946 ASV1C525
071863 ASV1C550
071864 ASV1C51K

Cavo / Cable

2.5mt. Poliuretano, Isolamento PVC / 2.5mt. PUR, PVC insulation
5mt. Poliuretano, Isolamento PVC / 5mt. PUR, PVC insulation
10mt. Poliuretano, Isolamento PVC / 10mt. PUR, PVC insulation

DIMENSION**CONNECT DIAGRAM****SPECIFICATION**

Tipo Sensore Sensor type	Reed switch
Logica Switching logic	Normalmente Aperto SPST Normally Open
Voltaggio Operating Voltage	5-240 V DC/AC 50/60 Hz
Corrente Switching Current	100 mA max.
Potenza Power Rating	10 Watts
Caduta di Voltaggio Voltage Drop	3.0 V max
LED	Red (Rosso)
Frequenza Operating Frequency	200 Hz
Temperatura Temperature Range	-10°C to +70°C
Protezione Protection	IP 67
Coppia Massima Vite Screw Max. Torque	0.2 Nm

PR-0043C 2010/03 Printing